



CASE
CONSTRUCTION

FX SERIES LOADER BACKHOES



770FX | 851FX | 770FX Plus | 851FX Plus




ACROSS HISTORY

FX SERIES LOADER BACKHOES

CASE presented the world with its first ever factory-integrated Loader Backhoe. Over the years, many other industry firsts were added to these wonder machines. Now, CASE presents its latest offering in Loader Backhoes, the FX Series. Boasting of a BS4 engine and class leading operator station, FX Series is a revolutionary step towards an extended care for the people and environment, something that has always been part of the CASE DNA.

The world-class manufacturing facility at Pithampur is in sync with the vision of Make in India for the world. The facility takes the pride of manufacturing machines that are in turn exported to 25 countries.

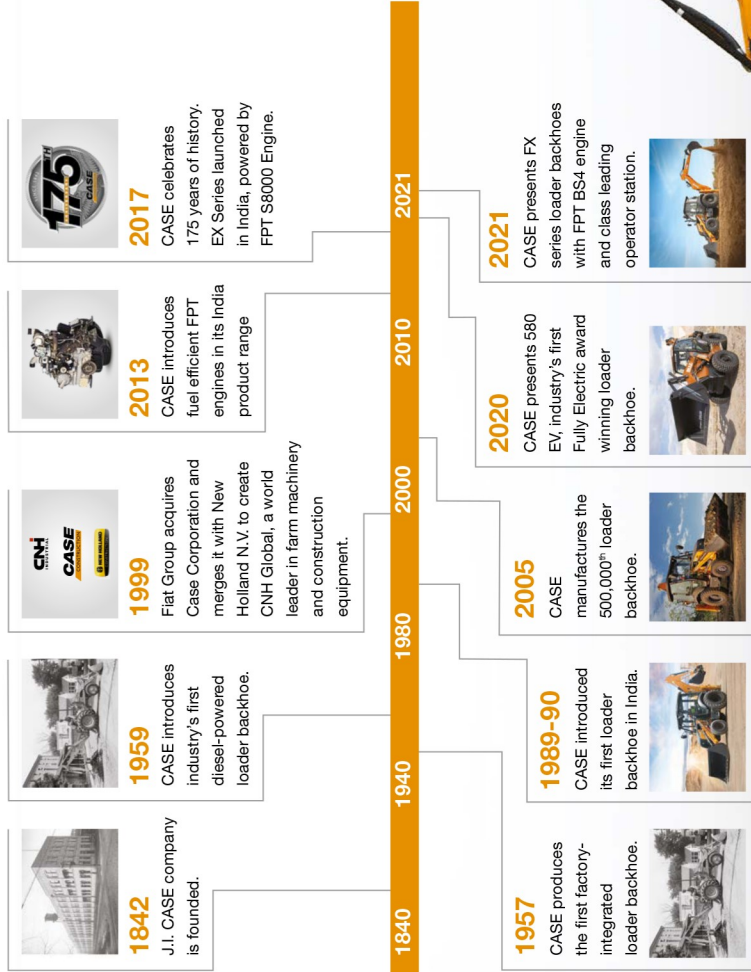

MAIN REASONS TO CHOOSE FX SERIES



A LEGACY OF HIGH PERFORMANCE

Efficient CEV-IV compliant FPT engine with high power and torque density coupled with proven transmission provides best-in-class dozing, stockpiling and travel capability.



IMPROVED OPERATOR STATION

Electronic hand throttle and foot accelerator pedal, increased storage spaces, one touch idle, intuitive side cluster, comfortable and multi-adjustable operator seat in a spacious world-class cabin improve productivity for every operator.



HIGH VISIBILITY

Sloping bonnet, new side quarter windows, newly positioned work lamps and New Gen Low Glare Cabin Interiors improve all around visibility.



FAST LOADING CYCLE

The improved FNR lever location supports fast directional change, improving site manoeuvrability and productivity.



CASE DNA "STYLED BACKHOE"

The new backhoe represents the continuity of CASE DNA. The Styled boom provides higher reach and better digging depth.



STRAIGHT LOADER ARM

The CASE straight loader arm ensures better work visibility, loading performance and good site manoeuvrability. It also ensures less daily maintenance time.



IMPROVED FUEL EFFICIENCY

Advanced hydraulic system along with VVP provides fuel savings of ~12-14%. With the new ECO mode and Auto Idling feature, fuel savings go up to 20%



BIGGER AND BETTER

With the new FX series you can reach further and dig more per cycle. The backhoe offers class leading forces, various bucket sizes and dipper options.



TECHNICAL SUPERIORITY

High operating weight for best-in-class travel stability, leading breakout forces for the toughest terrains and improved ease of use with the new age controls.



BETTER STRUCTURE

Robot welded boom, dipper and chassis. Long lasting axles, pins & bushes and protected hoses.



ENHANCED SAFETY

New age inclined pillar cabin provides better travel safety. Engine Protection Shutdown protects against unplanned breakdown and AV warning system makes operations safer.

BS4 FOR THE ENVIRONMENT

BS4 ADVANCED EMISSION NORMS

BS4 (CEV) Regulation

In this revolutionary engine, particulate matter emission (PM) will be reduced by 16 times, Hydro Carbons (HC) and Nitrous Oxide (NOx) emission will also go down by seven times. It banks upon Diesel Oxidation Catalysts (DOC) to reduce harmful emissions dramatically. Using Superior technology, AD-BLUE : 32.5% Urea Solution is injected into Selective Catalyst Reduction (SCR) with a rate <10% of fuel consumption, which leads to reduced NOx emissions.

Superior Technology to Boost Efficiency

The all new FPT BS4 (CEV) 74 hp engine is 6% more fuel efficient and offers better response time owing to ECU. At the same time, its 97 hp variant is 6% more fuel efficient and offers 8% higher torque.



Diesel Oxidation Catalyst



FPT ELECTRONIC ENGINE


The New FX series offers FPT Electronic engine, which accurately controls the fuel injection to optimize the power delivery compared to mechanically controlled BS3 engines.

Upgrades and Advantages

FPT BS4 engine offers high performance with better power and torque management, better drivability and improved fuel efficiency.

Aftermarket Support

BS4 engines are highly dependable as they are designed and proven in Indian conditions. To ensure field readiness for the new generation engines, the vast network of dealers and support staff have been trained and certified for addressing BS4 engine technology.

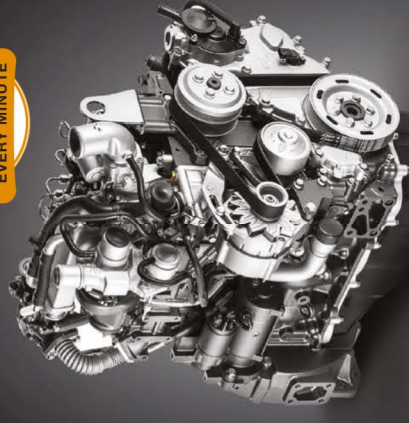

NEW GENERATION HYDRAULICS

Variable Displacement Pump

New generation hydraulics with VVP optimizes hydraulic oil flow as per load and improves fuel consumption up to 14%, which combined with ECO MODE and AUTO IDLE offer up to 20% better fuel economy and potential savings worth 2.2 lacs annually. It also offers faster cycle time compared to gear pump, thereby improving the productivity.



Variable Displacement Pump



Up To **14%***
Fuel Savings With
Variable Pump



Fx Series Offers
Up To **20%***
Fuel Savings

ECO Mode

Automatically limits the peak engine rpm both in Backhoe and Loader function depending on the seat position.



One Touch Idle

If no hydraulic operations are active, Engine comes to idle rpm (950 rpm) after a predefined time, thereby reducing the wastage of fuel.




*T&C apply

COMFORTABLE AND PRODUCTIVE OPERATOR STATION



RIGHT – Information Cluster and Controls

- The new gen MID - analogue gauges showing critical machine parameters
- Digital screen for setting machine parameters/ diagnostics
- Audio and visual warning system, which alerts the operator in case any of the critical parameters are outside the acceptable range
- Engine protection shutdown
- On-cluster controls - ECO mode, Auto idle, Electronic RPM knob, 2WD/4WD selector and Electrical side shift
- Pillar mounted HVAC controls and mobile holder with net (Optional)
- Additional storage spaces on rear side and floor area with new bottle holder



FRONT – Travel and Loader Controls

- New parking brake mechanism – easy to access and operate vs ground placed setup
- Relocated FNR Lever-can be operated without removing the hand off the steering
- Large cushioned steering wheel
- Operator seat position - Seat position shifted towards steering wheel to have better control of steering, foot pedals and front dashboard
- Electronic accelerator pedal – low effort and high accuracy
- Low effort loader lever



LEFT – Entry and Exit

- LH door accessible from the operator seat
- Improved leg clearance turning from Loader to Backhoe and vice versa
- Larger buddy seat with lockable storage compartment
- Large side windows with easy open lever and auto latch mechanism



REAR – Backhoe Controls

- New side quarter window gives better visibility
- Improved efforts of rear sliding door
- Optional operator floor mat
- Backhoe lever mounted horn
- Low effort backhoe and stabilizer levers

UNMATCHED PRODUCTIVITY

Rear Quarter Window

Provides all round rear visibility and enhanced productivity. Reduced blind spots add to the safety of surroundings.

New Improved FNR Lever

The new FNR lever is close to the steering wheel, which ensures easier accessibility. It can be operated with hands on the steering wheel, making operations more efficient.

Large Cushioned Steering Wheel

Increased steering size from 340mm to 380mm offers lower effort of operation with better control and manoeuvrability.

Backhoe and Loader Lever Effort

Get comfortable and fatigue-free machine operations with the improved backhoe and loader levers. This ease and comfort increase the machine work hours for the operators, thereby enhancing productivity.

High Profile Bucket

New spill proof loader bucket improves bucket spill ratio, thereby enhancing loader productivity.

Increased Swing Tower Ground Clearance

Improvement in ground clearance by 2 inches enhances productivity in stockpiling application.



EASY MAINTENANCE

CASE knows that the easier it is to perform routine maintenance, the more likely it will get done. The easy serviceability due to the large access area available when opening the new tiltable front engine hood, is a hallmark of CASE Loader Backhoe machine design. To improve serviceability, the machine layout has been optimized to provide an easy access to all the main components.



COMMAND AND CONTROL REMOTELY

Eagle Eye Telematics

CASE brings to you a revolutionary technology "EAGLE EYE", which enhances the performance and safety of your machine.

This system helps you keep an eye on every significant detail such as:

- Key machine parameters
- Location, Cumulative HMR, Warning text alerts
- Performance reports - Engine running status ON/OFF, Fuel level, Oil pressure indication, Coolant temperature, Transmission temperature, Operating hour details



SAFER OPERATIONS LONGER WORK LIFE

Audio Visual Warning System

Quick information for serviceability that enhances the life of machine components, thus, reducing maintenance costs. Machine error diagnostics prevent any major failures resulting in higher productivity and extended work hours.



Engine Protection Shut Down

This feature will optionally allow the Vehicle Control Module (VCM) to shut down the engine if any of the critical operating parameters are out of the acceptable range like engine oil pressure, coolant temperature, transmission oil temperature, low DEF level and high DEF consumption etc. This will ensure that machine is protected against any major failure/breakdown and is failsafe for any unplanned expenses for the machine owner.



Backhoe Lever Mounted Horn

Excavator like horn mounted on the backhoe lever, improve, the safety of the surroundings.

Jump Start

In case battery gets over-discharged, this feature allows operator to short the battery with external power source and start the engine.




Safe Battery Compartment and Battery Cut Off Switch

Battery location is now safer. It is not prone to theft and is housed in a dust free environment that gives better life to the machine and results in lowered maintenance costs. Battery cut off switch is easy to use and secured.



Rear View Mirror

Internal Rear-View mirror, now comes as a standard fitment for additional visibility and safety, especially during reversing and roading application. Additionally, two standard external side view mirrors are provided.



PEACE OF MIND EASE OF MAINTENANCE



CASE Machines are designed to exceed expectations, CASE Care helps to keep your machine performing at its peak.



As a customer of CASE Construction, you deserve the additional peace of mind of knowing that your product is covered, in case of an unexpected return. CASE Protect removes the burden of cost and the inconvenience of mechanical failure once your manufacturer's warranty has expired.

1	PRIORITY SERVICE
2	SPECIALIZED SUPPORT
3	PRO-ACTIVE MAINTENANCE
4	HIGHER RESALE VALUE




SPARE PARTS

A robust dealer network, a fully stocked central warehouse and our well-connected depots help us in the smooth and on-time delivery of parts and services, thus, decreasing downtime and maximizing productivity and efficiency of your machine.

APPLICATIONS AND ATTACHMENTS

Complete Solutions for Every Need and Application

Brick Kiln | Crusher Application | Road and General Construction
Municipal Solid Waste Management | Trenching and Pipe-laying

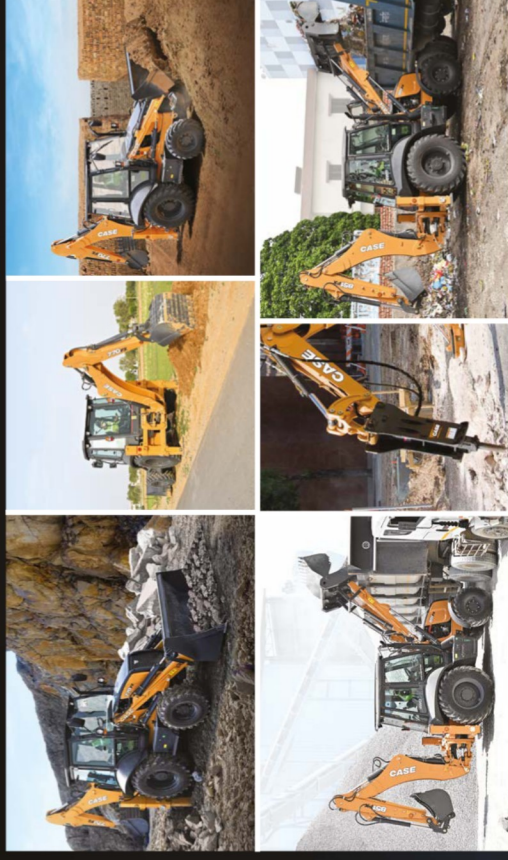

Attachments


Rock Breaker | Auger (Drill) for Plantation, Fencing and Light Pole | 4-in-1 and 6-in-1 BDB buckets

Bucket Options

Backhoe - 0.08, 0.12, 0.18 cum. | Loader - 0.63, 0.76, 0.9, 1.0, 1.2, 1.5 cum.



MODEL	770FX	770FX+	851FX	851FX+
ENGINE	F5HEL463A/W	F5HEL413A/W	FPT	FPT
Emission Compliant	Tier 4B	Tier 4B		
Engine Displacement (ltr)	3.4	3.4		
Engine Air Intake Type	Turbocharged	Turbocharged		
Engine Gross Power @ 2200rpm	74 hp	97 hp		
Engine Maximum Torque (Nm)	325 Nm	453 Nm		
HYDRAULIC SYSTEM				
System type	Open Centre	Closed Centre		
Pump Type	Variable Gear	Variable Gear		
Pump Flow (lpm) @ rated rpm	123	143	154	156
System Relief Pressure (bar)	195	210		
LOADER GENERAL DIMENSIONS				
A - Dump Height (m)	2.73	3.3	2.66	
B - Load Over Height (m)		3.3		
C - Hinge Pin Height (m)		3.6		
D - Hinge Pin Forward Reach (m)		0.24		
E - Reach at Ground (m)	1.08	2.08		
F - Max. Reach at Full Height (m)	1.19 (2WD), 1.15 (4WD)			
G - Max. Reach at Full Height-Bucket Dumped (m)	0.76	0.84		
H - Below Ground Level-Dig Depth (m)		0.11		
I - Rollback at Ground (deg.)		33		
J - Dump Angle (deg.)		45		
K - Bucket Capacity Std. (cum)	1.1	1.2		
L - Bucket Breakout Force (kgf)	6250	5520, 6250 (BDB)		
M - Loader Arm Breakout Force (kgf)	5115	4937, 5115 (BDB)		
N - Max. Payload (kg)	1925	2050, 1780 (BDB)		
O - Maximum Lifting Capacity @ Max. Height	3515	3700		
BACKHOE GENERAL DIMENSIONS				
P - Dipper Configuration	14ft	15ft		
K - Max. Dig Depth (m)	4.40	4.70		
L - Reach Ground Level to Swing Center (m)	5.62	5.90		
M - Reach-Ground Level to Rear Wheel Centre (m)	6.95	7.23		
N - Reach at Full Height to Swing Centre (m)	2.10	2.34		
O - Max. Working Height (m)	5.5	5.7		
P - Max. Load Over Height (m)	0.26	0.30		
Q - Bucket Rotation (deg.)	5606	204		
R - Bucket Breakout Force (kgf)	3264	3780		
S - Dipper Teatout Force (kgf)	1330	1530		
T - Max. Lift Capacity (kg)	1000	1100		
U - Safe Working Load (kg) @ 3.2m Radius				
OVERALL DIMENSIONS AND WEIGHTS				
Max. Operating Weight (kg)	7600	7920	8100	
Transport Length (m)	5.88	5.96	6.06	
R - Width Over Stabilizer (m)		2.27		
S - Width Over Bucket (m)		2.30		
T - Track Width- Rear (m)		1.70		
Track width- Front (m)		1.88 (2WD), 1.90 (4WD)		
T - Wheelbase (m)		2.18		
U - Minimum Ground Clearance (m)		0.38		
V - Height to Top of Cabin (m)		2.83		
W - Overall Transport Height (m)		3.85		
SERVICE CAPACITIES				
Engine Oil (ltr) - System		9.1		
Rear Axle (ltr)		17.1		
Hydraulic Oil (ltr) - System/ Replacement		107/2000hr		
Transmission Oil (ltr) - System		18-2WD, 20-4WD		
DEF Tank Capacity (ltr)		21 (851FXFX+)		
Fuel Tank (ltr)		129		
Coolant (ltr)		20		
POWER TRAIN				
Power Train Type		Power Shuttle with TC		
Transmission Make and Model		CARRARO 2WD/4WD TLBT		
AXLE				
Rear		CARRARO 28.32M		
Front		CARRARO 26.32M (2WD) CNH PS1300 (4WD)		
Front Axle Oscillation (deg.)		±21 (2WD), ±16 (4WD)		
STEERING				
Type		Power Steering		
System Pressure (bar)		140		
Pump Displacement (cc)		125		
Turning Circle Outside Bucket-Braked (m)		9.2 (2WD), 9.8 (4WD)		
Turning Circle Outside Bucket-Not Braked (m)		11.1 (2WD), 11.2 (4WD)		
BRAKES				
Service Parking		Wet Mud Discs, 4 Discs		
		Manual with Lever		
TYRE				
2WD - Standard - Front		9.0 x 16 - 16 PR		
2WD - Standard - Rear		16.9 x 28 - 12 PR		
2WD - Heavy duty - Rear		14.0 x 28 - 20 PR		
4WD - Heavy duty - Front		12.5 x 18 - 12 PR		
4WD - Standard - Rear		16.9 x 28 - 12 PR		
ELECTRICAL SYSTEM				
Battery		12 volts, 110 Ah		
TELEMATICS				
Engine Eye		Standard Fitment		
		Across all Models		
TRAVEL SPEED				
Forward (1st/2nd/3rd/4th)		770FXFX+ - 5.7/9.1/19.5/34.9 851FXFX+ - 6.2/10.0/20.7/39.2		
Reverse (1st/2nd/3rd/4th)		770FXFX+ - 7.0/11.2/23.8/NR 851FXFX+ - 7.4/12.0/24.8/NR		
OPTIONAL EQUIPMENT				
Cabin		HVAC		
Drive		4WD		
Fenders		Front in 4WD		
Loader Bucket		Bottom Dump Bucket		
Dipper		Extendable		
Counterweight		Light/Heavy/NC		
Dipper Option		14ft & 15ft		
Dipper Cylinder Dia. (mm)		110 - 770FX 125 - 770FX+ 110 - 851FX+ Heavy Duty		
Type				

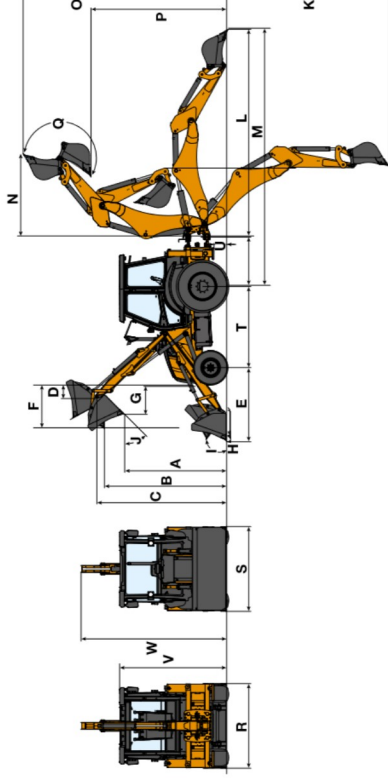



BUILDING A STRONG CASE.

Since 1842, at CASE Construction Equipment, we have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development.

The vast CASE dealers' network is always ready to support and protect your investment and exceed your expectations, while also providing you with the ultimate ownership experience.

Our goal is to build both stronger machines—and stronger communities. At the end of the day, we do what's right for our customers and our communities so that they can count on CASE.

CASE NEW HOLLAND CONSTRUCTION EQUIPMENT (INDIA) PRIVATE LIMITED

Level-4, Rectangle-1, D-4, District Center,
Commercial Complex, Saket, New Delhi - 110017
Contact No.: 011-66544151
Email: caseindia@cnhind.com

NOTE: CASE provides specific outfits for various countries and many optional fittings (OPT). The illustrations on this or other leaflets may relate to standard or optional fittings. Please consult your CASE dealer for any information in this regard and any possible updating on components. CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes. Disclaimer: 2.5% variation on parameters may occur and is acceptable by the industry norms

CaseCE.com 1800-4199-770

Follow us on    @caseceindia

