

L-SERIES CRAWLER DOZERS
1150L / 1650L

CASE
CONSTRUCTION



PERFECT IN
EVERY MISSION

CaseCE.com

EXPERTS FOR THE REAL WORLD
SINCE 1842

BOOST YOUR PRODUCTIVITY

POWER AND EFFICIENCY

Drawbar pulling leadership: the hydrostatic transmission and the common rail engine deliver best-in-class pulling capacity and controllability. All the working parameters can be customized by the driver for excellent machine controllability and faster cycle times. **Productivity boosting electronics:** the cab controls offer a wide choice of electronic settings and automated functions that make the driver's job easier. Together with the **lowest noise level** in the market, they minimise fatigue on long working days. **Quick maintenance:** the tilting cab provides an outstanding accessibility to all main components and enable you to service the L-Series from the ground for any extraordinary maintenance.



FPT INDUSTRIAL ENGINE

The state-of-the-art common rail engine delivers top performance in load response, max torque, power and fuel economy.

The turbocharged engine with an Air-to-Air intercooler relies on well proven multi injection technology to maximize torque back-up and fuel efficiency with reduced engine noise and vibrations.

NEVER ENDING POWER

The powerful FPT Industrial engine ensures high torque back-up under load. When the tractive effort grows and the rpm tends to drop, the engine power grows up to 16% till 1800 rpm. The result is constant performance and higher pulling capacity. In addition, the ability to work with high torque at lower engine rpm reduces engine wear.



DUAL PATH HYDROSTATIC TRANSMISSION

The entirely re-engineered transmission offers **best-in-class pulling capacity** combined with the typical **manoeuvrability of the hydrostatic solution**. The triple reduction final drives ensure high torque on the ground, reducing the working pressure of the entire system and improving its overall efficiency.

ROBUST UNDERCARRIAGE

The undercarriage featured on Case Crawler Dozers is designed for the toughest environments. Both 1150L and 1650L are available with the XLT tracks, to provide **excellent drawbar pull force and perfect dozing and grading accuracy at the same time**.

PAT BLADE AS STANDARD ON BOTH MODELS

Thanks to the **PAT (Power Angle Tilt) blade**, operators can do the job faster, easier, with more comfort, increasing the machine productivity and the capability to work in very different applications/environments: it is the ideal solution for this class of dozers, that are used in residential, commercial, utility and roads and bridges site preparation work.

EASY SERVICEABILITY - GROUND ACCESS AND TILTABLE CAB

CASE Dozers are designed to grant ground access to all periodic service and check points, to ease the maintenance and extend machine life. Further more, the **tiltable cab** provides full accessibility of all main components even in CASE of any extraordinary service maintenance.



PRODUCTIVITY BOOSTING ELECTRONICS



AGILE AND STRONG

The operator has full control of the massive power of the L-Series Dozers. The electro-hydraulic joystick allows to customise the reversing and steering sensitivity for faster and more efficient cycles. The decelerator pedal can be used either to reduce the travel speed only or travel speed and engine rpm.



ADJUSTABLE BLADE PITCH

The low-effort blade hydraulics feature powerful cylinders able to move the blade with ease and control. The mechanical pitch blade can be set between 50 to 60 degrees to suit every dozing application and ground condition.




UNMATCHED VISIBILITY

The L-Series cab is engineered for operator performance, comfort and safety. Thanks to the excellent visibility, the operator can work with confidence and more productively in every operation. The air suspended seat is easy to adjust, providing every operator with a perfect working position. The powerful air conditioning system combined with the best-in-class noise level provide an excellent working environment, reducing operator stress during long working days.


L-SERIES CRAWLER DOZER

SPEC SHEETS

GENERAL DIMENSIONS

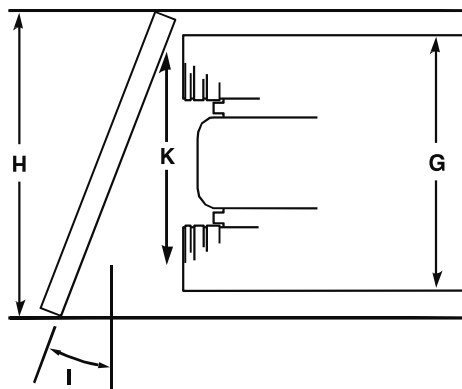

Line drawings are for illustrative purpose only and may not be exact representation of unit.

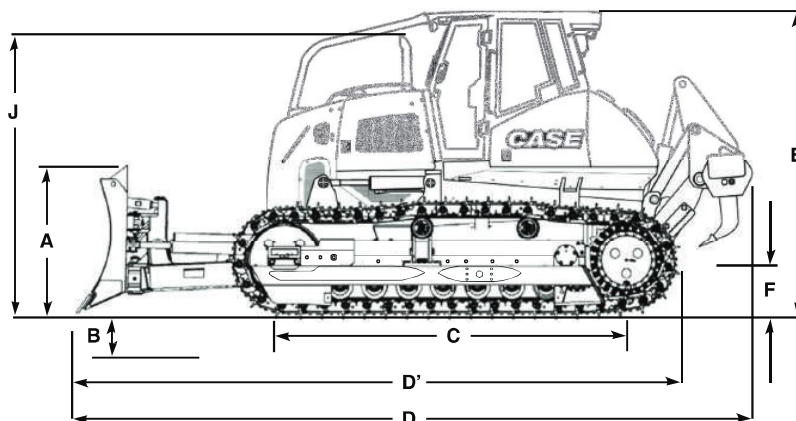

1150L

DIMENSION	XLT (extra-long track)
A Blade height	1120 mm
B Depth of the blade in the ground	483 mm
C Length of the track on the ground	2590 mm
D Length of the blade in the straight position and ripper	5973 mm
D' With blade in the straight position and drawbar	5025 mm
E Height to top of cab	2882 mm
F Ground clearance	379 mm
G Width to the ends of the tracks	2286 mm
H Width of the blade at a maximum angle	2787 mm
Width of the blade fully placed on the ground	3048 mm

DIMENSION	XLT (extra-long track)
I Blade angle of attack	25°
J Height of the exhaust	2849 mm
K Track Gauge	1778 mm
Width of the shoe	508 mm
Area of the track on the ground	26323 cm ²
Pressure on the ground	0.47 kgf/cm ²
SAE blade capacity	2.9 m ³
Elevation of the blade over the ground	965 mm
Blade oscillation (up to 8.3°)	439 mm

1650L

DIMENSION	XLT (extra-long track)
A Blade height	1183 mm
B Depth of the blade in the ground	490 mm
C Length of the track on the ground	3050 mm
D Length of the blade in the straight position and ripper	6637 mm
D' With blade in the straight position and drawbar	5482 mm
E Height to top of cab	3057 mm
F Ground clearance	347 mm
G Width to the ends of the tracks	2438 mm
H Width of the blade at a maximum angle	2810 mm
Width of the blade fully placed on the ground	3175 mm

DIMENSION	XLT (extra-long track)
I Blade angle of attack	25.7°
J Height of the exhaust	2884 mm
K Track Gauge	1880 mm
Width of the shoe	559 mm
Area of the track on the ground	34093 cm ²
Pressure on the ground	0.47 kgf/cm ²
SAE blade capacity	3.5 m ³
Elevation of the blade over the ground	950 mm
Blade oscillation (up to 8.3°)	450 mm

NOTE: Ground clearance and overall height dimensions are with the grousers fully penetrated. Add 52.5 mm if unit is on solid surface.

1150L CRAWLER DOZER

SPEC SHEETS

ENGINE

Model.....	FPT Industrial Engine F4HE9684K
Cylinders.....	6
Displacement.....	6.7 L
Fuel injection.....	Direct common rail
Fuel filter.....	Screw-on, with screen
Cooling.....	Liquid
Engine speeds.....	RPM
High idle - no load.....	2200 +/- 50
Rated - full load.....	2200
Low idle.....	800+/- 25

Horsepower SAEJ1349

Net.....	118 hp (88kW) @ 2200rpm
Gross.....	130hp (97kW) @ 2200rpm

Engine lubrication

"Forced lubrication" with oil jet piston refrigeration system

Pump operating angle ratings

Side-to-side.....	45°
Fore and aft.....	45°

Radiator

Core size area.....	0.61 m²
Rows of tubes.....	4

Fan

Diameter.....	660 mm
Propeller.....	Belt mechanical drive

TRANSMISSION COOLING

Type.....	Heat exchange
Core size.....	0.54 m²

ELECTRICAL SYSTEM

Alternator.....	65 amps
Batteries(2).....	2X12 V in series, maintenance free, 750 A CCA at -18°C

POWERTRAIN

Dual path hydrostatic

Pump.....	Variable axial piston
Motor.....	Variable bent axis piston
Max. drawbar pull.....	214 kN
Transmission.....	Single lever control electronic tracking
Oil filter.....	4 micron, spin-on, replaceable

Travel speeds

Forward.....	0-9.7 km/h
Reverse.....	0-9.7 km/h
SAHR parking brake (Spring applied hydraulically released)	
Steering brakes.....	Hydrostatic
Final drive.....	2 helical gear reductions to planetary reduction
Reduction ratio.....	61.4:1

HYDRAULICS

Pump Flow@2200 RPM.....	132 L/min
Max pressure.....	207 bar
Lift cylinder PAT.....	nr.2
Bore diameter.....	108 mm
Rod diameter.....	50.8 mm
Stroke.....	445 mm
Angle cylinder PAT.....	nr.2
Bore diameter.....	127 mm
Rod diameter.....	63.5 mm
Stroke.....	381 mm
Tilt cylinder PAT.....	nr.1
Bore diameter.....	127 mm
Rod diameter.....	63.5 mm
Stroke.....	120 mm

OPERATOR ENVIRONMENT

Cab ROPS/FOPS with air - conditioning - single joystick for speed and direction-adjustable seat upholstered with cloth and air suspension - 50.8 mm (2") retractable seatbelt - adjustable arm rests - two foot rests - rear view mirror - three windshield wipers - a dome light - 12 V connector for accessories - padded roof - floor mats.

Warning lights

Air filter - alternator - failure diagnosis indicator - engine cooling fluid temperature - engine oil pressure - hydraulic filter - low fuel - emergency brake on - maintenance service indicator - transmission filter - transmission load pressure.

Indicators

Battery voltage - fuel level - digital hour meter/tachometer/diagnosis/service reminder - transmission oil temperature - transmission speed indicator - cooling fluid temperature.

Audible alarms

Engine cooling fluid temperature - engine oil pressure - low fuel - hydraulic/hydrostatic system oil temperature.

OPERATING WEIGHT

Unit equipped with a cab, full fuel tank, 77 kg operator, frontal pull hook, track guides, PAT blade.

WEIGHT (KG)

Extra Long Tracks (XLT).....	13625 kg
------------------------------	----------

ADD-ON WEIGHTS

WEIGHT (KG)

Drawbar.....	66 kg
Ripper.....	1043 kg
Roller protection.....	134 kg

BLADE

Variable blade pitch - adjustable.....	55° to 60°
Lift speed - per second.....	483 mm
Cutting edge.....	Reversible, replaceable
Width.....	200 mm
Length.....	2158 mm
Thickness.....	19.1 mm

UNDERCARRIAGE

Track adjustment.....	Grease injection
Hydraulic frame.....	Two-tier chassis, manufactured in structural steel
Track link pitch.....	175.4 mm
Track shoe height.....	51 mm
Pin diameter.....	36.6 mm
Bushing diameter.....	62 mm
Track shoes per side.....	43
Track rollers per side.....	7
Carrier rollers per side.....	2
Track roller rail diameter.....	190 mm

TRACK ON GROUND

Shoe width.....	508 mm
Tracks on ground.....	26323 cm²

RIPPER

Max. penetration.....	478 mm
Width.....	1711 mm
Cut width.....	1635 mm
Max. ground clearance.....	424 mm
Max. number of shanks.....	3
Tooth spacing w/3 teeth.....	785 mm
Hydraulic cylinder.....	Double-acting
Diameter.....	102 mm
Stroke.....	254 mm
Rod.....	51 mm

SERVICE CAPACITY

Fuel tank.....	300 L
Engine oil w/filter.....	16.4 L
Engine oil w/o filter.....	15.6 L
Engine cooling system.....	25.5 L
Hydraulic reservoir.....	98.4 L
Final drive - per side.....	14.2 L
Track rollers - each.....	0.330 L
Front idlers - each.....	0.460 L
Carrier rollers - each.....	0.275 L

1650L CRAWLER DOZER

SPEC SHEETS

ENGINE

Model.....	FPT Industrial Engine F4HE9684U
Cylinders.....	6
Displacement.....	6.7 L
Fuel injection.....	Direct common rail
Fuel filter.....	Screw-on, with screen
Cooling.....	Liquid
Engine speeds.....	RPM
High idle - no load.....	2200 +/- 50
Rated - full load.....	2200
Low idle.....	800 +/- 25

Horsepower SAEJ1349

Net.....	144 hp (107kW) @ 2200rpm
Gross.....	156 hp (116kW) @ 2200rpm

Engine lubrication

"Forced lubrication" with oil jet piston refrigeration system

Pump operating angle ratings

Side-to-side.....	45°
Fore and aft.....	45°

Radiator

Core size area.....	0.61 m²
Rows of tubes.....	4

Fan

Diameter.....	660 mm
Propeller.....	Belt mechanical drive

TRANSMISSION COOLING

Type.....	Heat exchange
Core size.....	0.54 m²

ELECTRICAL SYSTEM

Alternator.....	65 amps
Batteries(2).....	2X12 V in series, maintenance free, 750 A CCA at -18°C

POWERTRAIN

Dual path hydrostatic

Pump.....	Variable axial piston
Motor.....	Variable bent axis piston
Max. drawbar pull.....	275 kN
Transmission.....	Single lever control electronic straight tracking
Oil filter.....	4 micron, spin-on, replaceable

Travel speeds

Forward.....	0-9.7 km/h
Reverse.....	0-9.7 km/h
SAHR parking brake (Spring applied hydraulically released)	
Steering brakes.....	Hydrostatic
Final drive.....	2 helical gear reductions to planetary reduction
Reduction ratio.....	61.4:1

HYDRAULICS

Pump Flow @2200 RPM.....	132 L/min
Max pressure.....	207 bar
Lift cylinder PAT.....	nr.2
Bore diameter.....	88.9 mm
Rod diameter.....	50.8 mm
Stroke.....	826 mm
Angle cylinder PAT.....	nr.2
Bore diameter.....	101.6 mm
Rod diameter.....	50.8 mm
Stroke.....	508 mm
Tilt cylinder PAT.....	nr.1
Bore diameter.....	127 mm
Rod diameter.....	63.5 mm
Stroke.....	135 mm

OPERATOR ENVIRONMENT

Cab ROPS/FOPS compartment with air - conditioning - single joystick for speed and direction - adjustable seat upholstered with cloth and air suspension - 50.8mm(2") retractable seatbelt - adjustable arm rests - two foot rests - rear view mirror - three windshield wipers - a dome light - 12 V connector for accessories - padded roof - floor mats.

Warning lights

Air filter - alternator - failure diagnosis indicator - engine cooling fluid temperature - engine oil pressure - hydraulic filter - low fuel-emergency brake on - maintenance service indicator - transmission filter - transmission load pressure.

Indicators

Battery voltage - fuel level - digital hour meter/tachometer/diagnosis/service reminder - transmission oil temperature - transmission speed indicator - cooling fluid temperature.

Audible alarms

Engine cooling fluid temperature - engine oil pressure - low fuel - hydraulic/hydrostatic system oil temperature.

OPERATING WEIGHT

Unit equipped with a compartment, full fuel tank, 77 kg (170 lb) operator, frontal traction hook, track protection, PAT blade, rear drawbar pull.

WEIGHT (KG)

Extra Long Tracks (XLT).....	17960 kg
------------------------------	----------

ADD-ON WEIGHTS

WEIGHT (KG)

Drawbar.....	66 kg
Ripper.....	1600 kg
Roller protection.....	242.2 kg

BLADE

Variable blade pitch - adjustable.....	55° to 60°
Lift speed - per second.....	483 mm
Cutting edge.....	Reversible, replaceable
Width.....	200 mm
Length.....	2352 mm
Thickness.....	20 mm

UNDERCARRIAGE

Track adjustment.....	Grease injection
Frame.....	Two-tier chassis, manufactured in structural steel
Track link pitch.....	190 mm
Track shoe height.....	56 mm
Pin diameter.....	38.5 mm
Bushing diameter.....	65 mm
Track shoes per side.....	45
Track rollers per side.....	8
Carrier rollers per side.....	2
Track roller rail diameter.....	203 mm

TRACK ON GROUND

Shoe width.....	559 mm
Tracks on ground.....	34093 cm²

RIPPER

Max. penetration.....	478 mm
Width.....	1985 mm
Cut width.....	1942 mm
Max. ground clearance.....	262 mm
Max. number of shanks.....	3
Tooth spacing w/3 teeth.....	940 mm
Hydraulic cylinder.....	Double-acting
Diameter.....	102 mm
Stroke.....	254 mm
Rod.....	51 mm

SERVICE CAPACITY

Fuel tank.....	300 L
Engine oil w/filter.....	16.4 L
Engine oil w/o filter.....	15.6 L
Engine cooling system.....	25.5 L
Hydraulic reservoir.....	98.4 L
Final drive - per side.....	14.2 L
Track rollers - each.....	0.275 L
Front idlers - each.....	0.225 L
Carrier rollers - each.....	0.334 L

CaseCE.com

EXPERTS FOR THE REAL WORLD
SINCE 1842

CASE
CONSTRUCTION

STANDARD

ENGINE

FPT Industrial engine NEF Family
Fan belt automatic tensioner
Engine oil cooler
Fuel filter
Dual element radial seat air cleaner
Turbine type pre-filter
65 A alternator
Battery (2) 12V 750 A CCA
Cooling system with radiators protected against possible sand projection
Excellent access for maintenance by panels on the sides of the engine

POWERTRAIN

2-way closed circuit with automatic speed variation with hydrostatic drive and electric control that adjusts the power and speed independently for each tread while turning or counter-rotating.

FINAL COMMANDS

Triple reduction of final commands
SAHR type parking brake (applied by spring and released by hydraulic pressure)

UNDERCARRIAGE

Hydraulic adjustment of the tracks through grease injection CASE Lubricated Track (CLT)
Sealed and Lubricated pins, upper and lower rollers sealed and lubricated
Front and rear track guides

BLADE

With manual inclination adjustment from 55° to 60°
Blade control with a single lever (electric-hydraulic) on the right side of the operator, with infinitely variable positions to control the six blade function (up, down, angled to the left and right, tilt to the left and right)

OPERATOR ENVIRONMENT

Cab ROPS/FOPS with A/C
Single joystick for speed and direction
Adjustable seat
Adjustable arm rests
50.8 mm (2") retractable seatbelt

OTHER

Anti-vandalism package
Reverse gear warning
Horn
Lights: 2 in front and 1 in rear
Master key
Mirror
Frontal tow hook
Frontal transmission protection

OPTIONAL

REAR MOUNTED EQUIPMENT

Rear draw bar
Ripper with 3 shanks

GUARDS

CAB canopy brush guard

OTHER

Drains that protect the environment while changing fluids
Intake air heater for ignition in cold climates

OPERATOR ENVIRONMENT

Rear windshield wiper
Additional work lights totaling four in the front and two in the back
rearview mirrors

Corporate Identity Number: U29240DL1998PTC344616
CASE NEW HOLLAND CONSTRUCTION EQUIPMENT (INDIA) PRIVATE LIMITED
Level-4, Rectangle-1, D-4
District Center, Commercial Complex
Saket, New Delhi - 110017
Contact No.: 011-66544151 | Email: caseindia@cnhind.com

NOTE: CASE provides specific outfits for various countries and many optional fittings (OPT). The illustrations on this or other leaflets may relate to standard or optional fittings. Please consult your CASE dealer for any information in this regard and any possible updating on components. CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

CASE Customer Assistance
1800 4199 770

